



Additional notes as requested by  
Buckinghamshire Highways

- Any covers likely to be overrun must be D400 Heavy Duty specification'.
- All works must be inspected in accordance with the Council's 'pre-commencement ticksheet' available upon request from the Council's Highways Development Management Team.
- All highway verges effected by the works must be top soiled and seeded prior to the provisional certificate being issued.
- All existing highway reinstatements must be one full lane width minimum i.e to the centreline.
- Any tie-in areas must be discussed and agreed with the Transport Inspector onsite'.
- The contractor must present NRSWA accreditation cards upon Inspector's request onsite.
- All lining within the extents of the scheme to be refreshed.

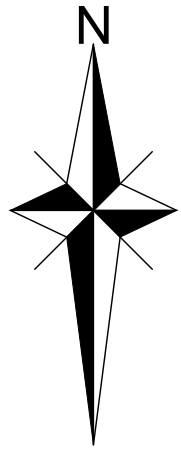

| Line Type Schedule (dims in mm) |       |        |            |       |      |
|---------------------------------|-------|--------|------------|-------|------|
| Diag.                           | Width | colour | Line       | Space | Line |
| 1003 A                          | 200   | White  | 600        | 300   | 600  |
| 1004                            | 100   | White  | 4000       | 2000  | 4000 |
| 1009 A                          | 100   | White  | 600        | 300   | 600  |
| 1010                            | 100   | White  | 1000       | 1000  | 1000 |
| 1028.4                          | 100   | White  | 600        | 600   | 600  |
|                                 |       |        |            |       |      |
| 1049 B                          | 200   | White  | Continuous |       |      |
| 1023 A                          |       | White  | 3750 long  |       |      |
| Bus Cage (1025.1)               |       |        |            |       |      |
| 1049 B                          | 200   | Yellow | 15000 long |       |      |
| 1010                            | 100   | Yellow | 1000       | 1000  | 1000 |

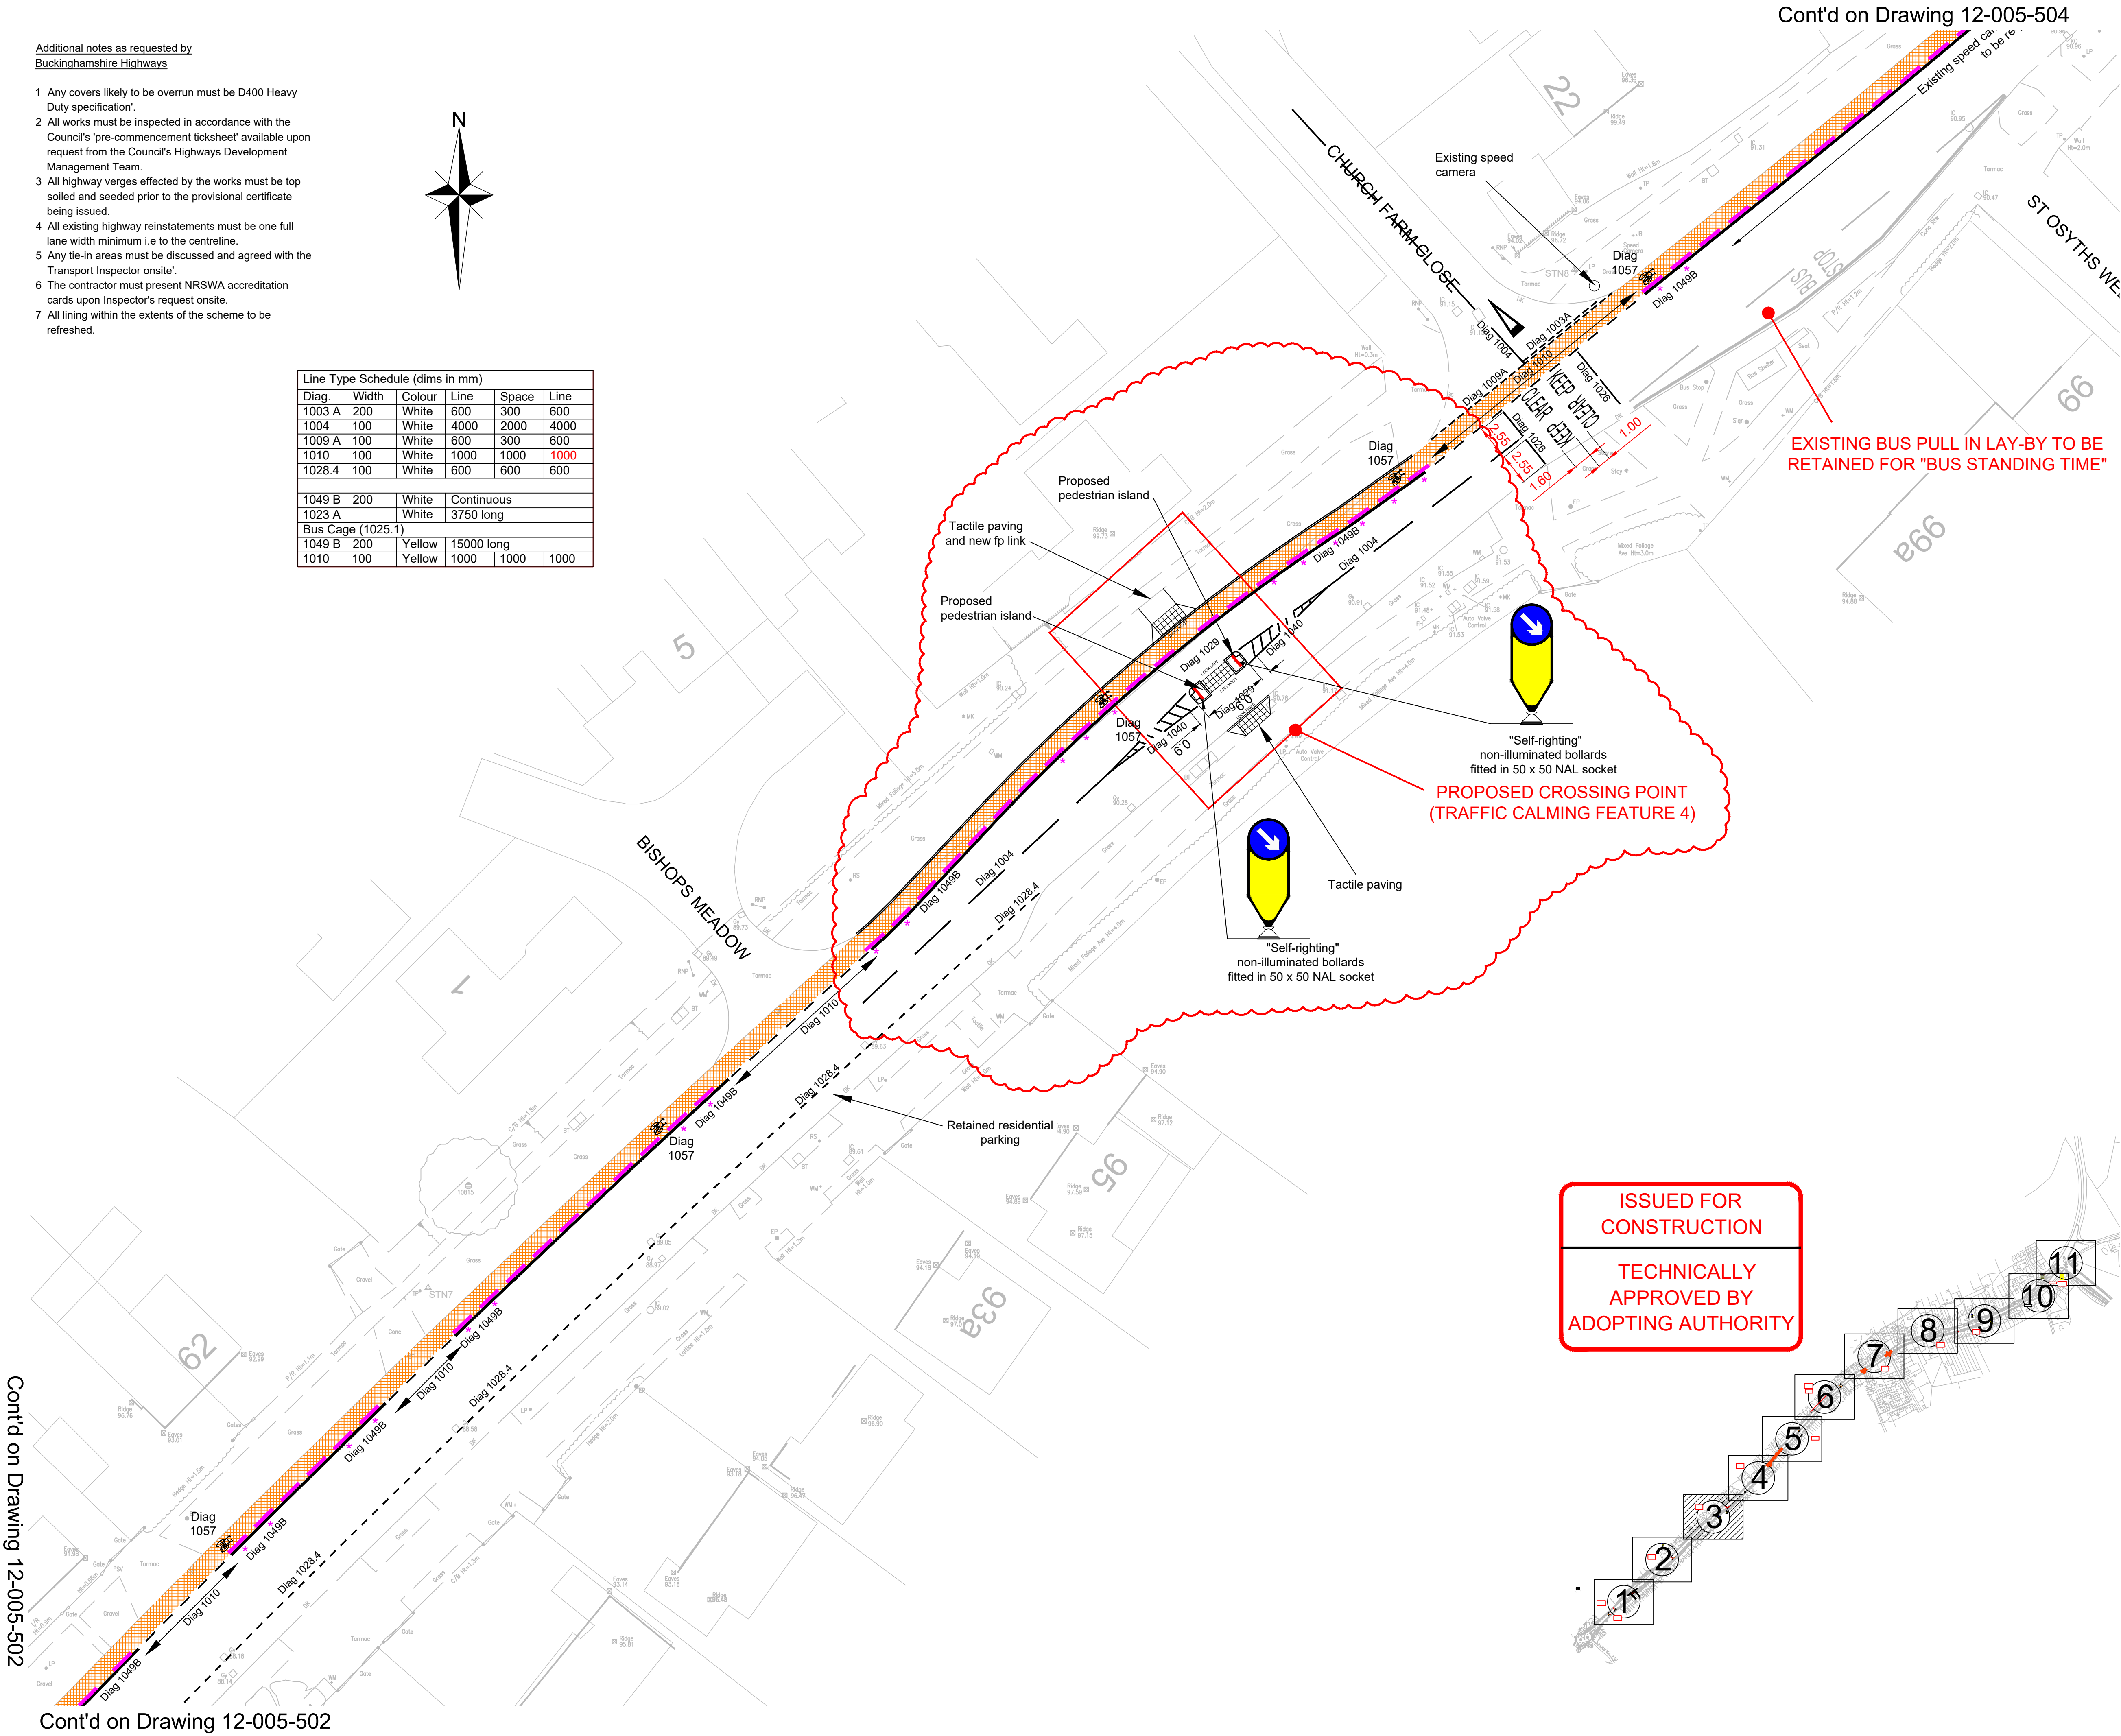

Cont'd on Drawing 12-005-504

Cont'd on Drawing 12-005-504

- NOTES
- This drawing is to be read in conjunction with the relevant specification and the following drawings:- 12-005-501 and 12-005-502 and 12-005-504 to 12-005-511 - General Arrangement Layouts.
  - All materials and workmanship shall comply fully with the Manual of Contract Documents for Highways Works, Specification for Highways Works Volume 1 and the Buckinghamshire County Council Specification for Road Construction and Standard Details.
  - Refer to drawings 12-005-512 to 12-005-522 inclusive for Site Clearance Plans.
  - Refer to drawings 12-005-523 to 12-005-533 inclusive for Surface Finishes Plans.
  - Refer to drawings 12-005-534 to 12-005-544 for the Existing Services Plans.
  - Do NOT scale from this drawing. Work from figured dimensions and Setting Out information ONLY.
  - Any covers likely to be overrun must be D400 Heavy Duty specification'.
  - All works must be inspected in accordance with the Council's 'pre-commencement ticksheet' available upon request from the Council's Highways Development Management Team.
  - All highway verges effected by the works must be top soiled and seeded prior to the provisional certificate being issued.
  - All existing highway reinstatements must be one full lane width minimum i.e to the centreline.
  - Any tie-in areas must be discussed and agreed with the Transport Inspector onsite'.
  - The contractor must present NRSWA accreditation cards upon Inspector's request onsite.
  - All lining within the extents of the scheme to be refreshed.
  - Any covers likely to be overrun must be D400 Heavy Duty specification'.
  - All works must be inspected in accordance with the Council's 'pre-commencement ticksheet' available upon request from the Council's Highways Development Management Team.
  - All highway verges effected by the works must be top soiled and seeded prior to the provisional certificate being issued.
  - All existing highway reinstatements must be one full lane width minimum i.e to the centreline.
  - Any tie-in areas must be discussed and agreed with the Transport Inspector onsite'.
  - The contractor must present NRSWA accreditation cards upon Inspector's request onsite.
  - All lining within the extents of the scheme to be refreshed.

- LEGEND
- Proposed cycle lane
  - Cycle lane separator NCDL Lite by Rosehill Highways (or similar approved). Rosehill drawing no. RHP 0049. Separators marked "+" to be fitted with bollard as per drawing. Separators to be placed as shown with minimum 1.0m gap.

|     |                                                                                |    |     |     |         |
|-----|--------------------------------------------------------------------------------|----|-----|-----|---------|
| K   | Amended following discussions with BC highways                                 | EV | GG  | GC  | Sept 24 |
| J   | Amended following discussions with BC highways                                 | EV | GG  | GC  | Aug 24  |
| H   | Amended following discussions with BC highways and farmer                      | EV | GG  | GC  | Aug 24  |
| G   | Amended following discussions with BC highways and farmer                      | EV | GG  | GC  | Aug 24  |
| F   | Issued for Construction - Technically approved                                 | EV | GG  | GC  | July 24 |
| E   | Lining table amended following Technical Comments 3 from BC highways           | EV | GG  | GC  | July 24 |
| D   | Amended following Technical Comments 2 from BC highways                        | EV | GG  | GC  | July 24 |
| C   | Bollards amended following comments from BC lighting engineering (Tim Edwards) | EV | GG  | GC  | June 24 |
| B   | Amended following comments from BC lighting engineering (Alkins realis)        | EV | GG  | GC  | May 24  |
| A   | Amended following comments from BC highways                                    | EV | GG  | GC  | May 24  |
| Rev | Amendments                                                                     | Dm | Chk | App | Date    |



Landmark House  
Station Road  
Hemel Hempstead  
Herts AL1 1BB  
01462 68420

Issued by

Park House  
Park Farm  
East Malling Trust Estate  
Brambourne Lane  
Aylesford Kent  
ME20 6SN  
01732 449768

enquiries@c-a.uk.com  
www.c-a.uk.com

Job Title

Kingsbrook, Aylesbury  
Bierton Traffic Calming Measures

Drawing Title  
General Arrangement Layout  
3 of 11

Client  
BDW North Thames Ltd

|                                          |                                |                 |
|------------------------------------------|--------------------------------|-----------------|
| Scale<br>1:250 @ A1                      | Date<br>Jan 24                 | Designed<br>GG  |
| Drawn<br>EV                              | Checked<br>GW                  | Approved<br>GAC |
| Job No<br>12-005                         | C & A Drawing No<br>12-005-503 | Rev<br>K        |
| Client Drawing No<br>12-005-H6700-D2-503 |                                |                 |