



Additional notes as requested by Buckinghamshire Highways

- 1 Any covers likely to be overrun must be D400 Heavy Duty specification.
- 2 All works must be inspected in accordance with the Council's 'pre-commencement ticksheet' available upon request from the Council's Highways Development Management Team.
- 3 All highway verges effected by the works must be top soiled and seeded prior to the provisional certificate being issued.
- 4 All existing highway reinstatements must be one full lane width minimum i.e to the centreline.
- 5 Any tie-in areas must be discussed and agreed with the Transport Inspector onsite.
- 6 The contractor must present NRSWA accreditation cards upon Inspector's request onsite.
- 7 All lining within the extents of the scheme to be refreshed.

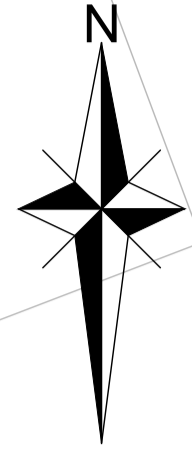

The Paddocks

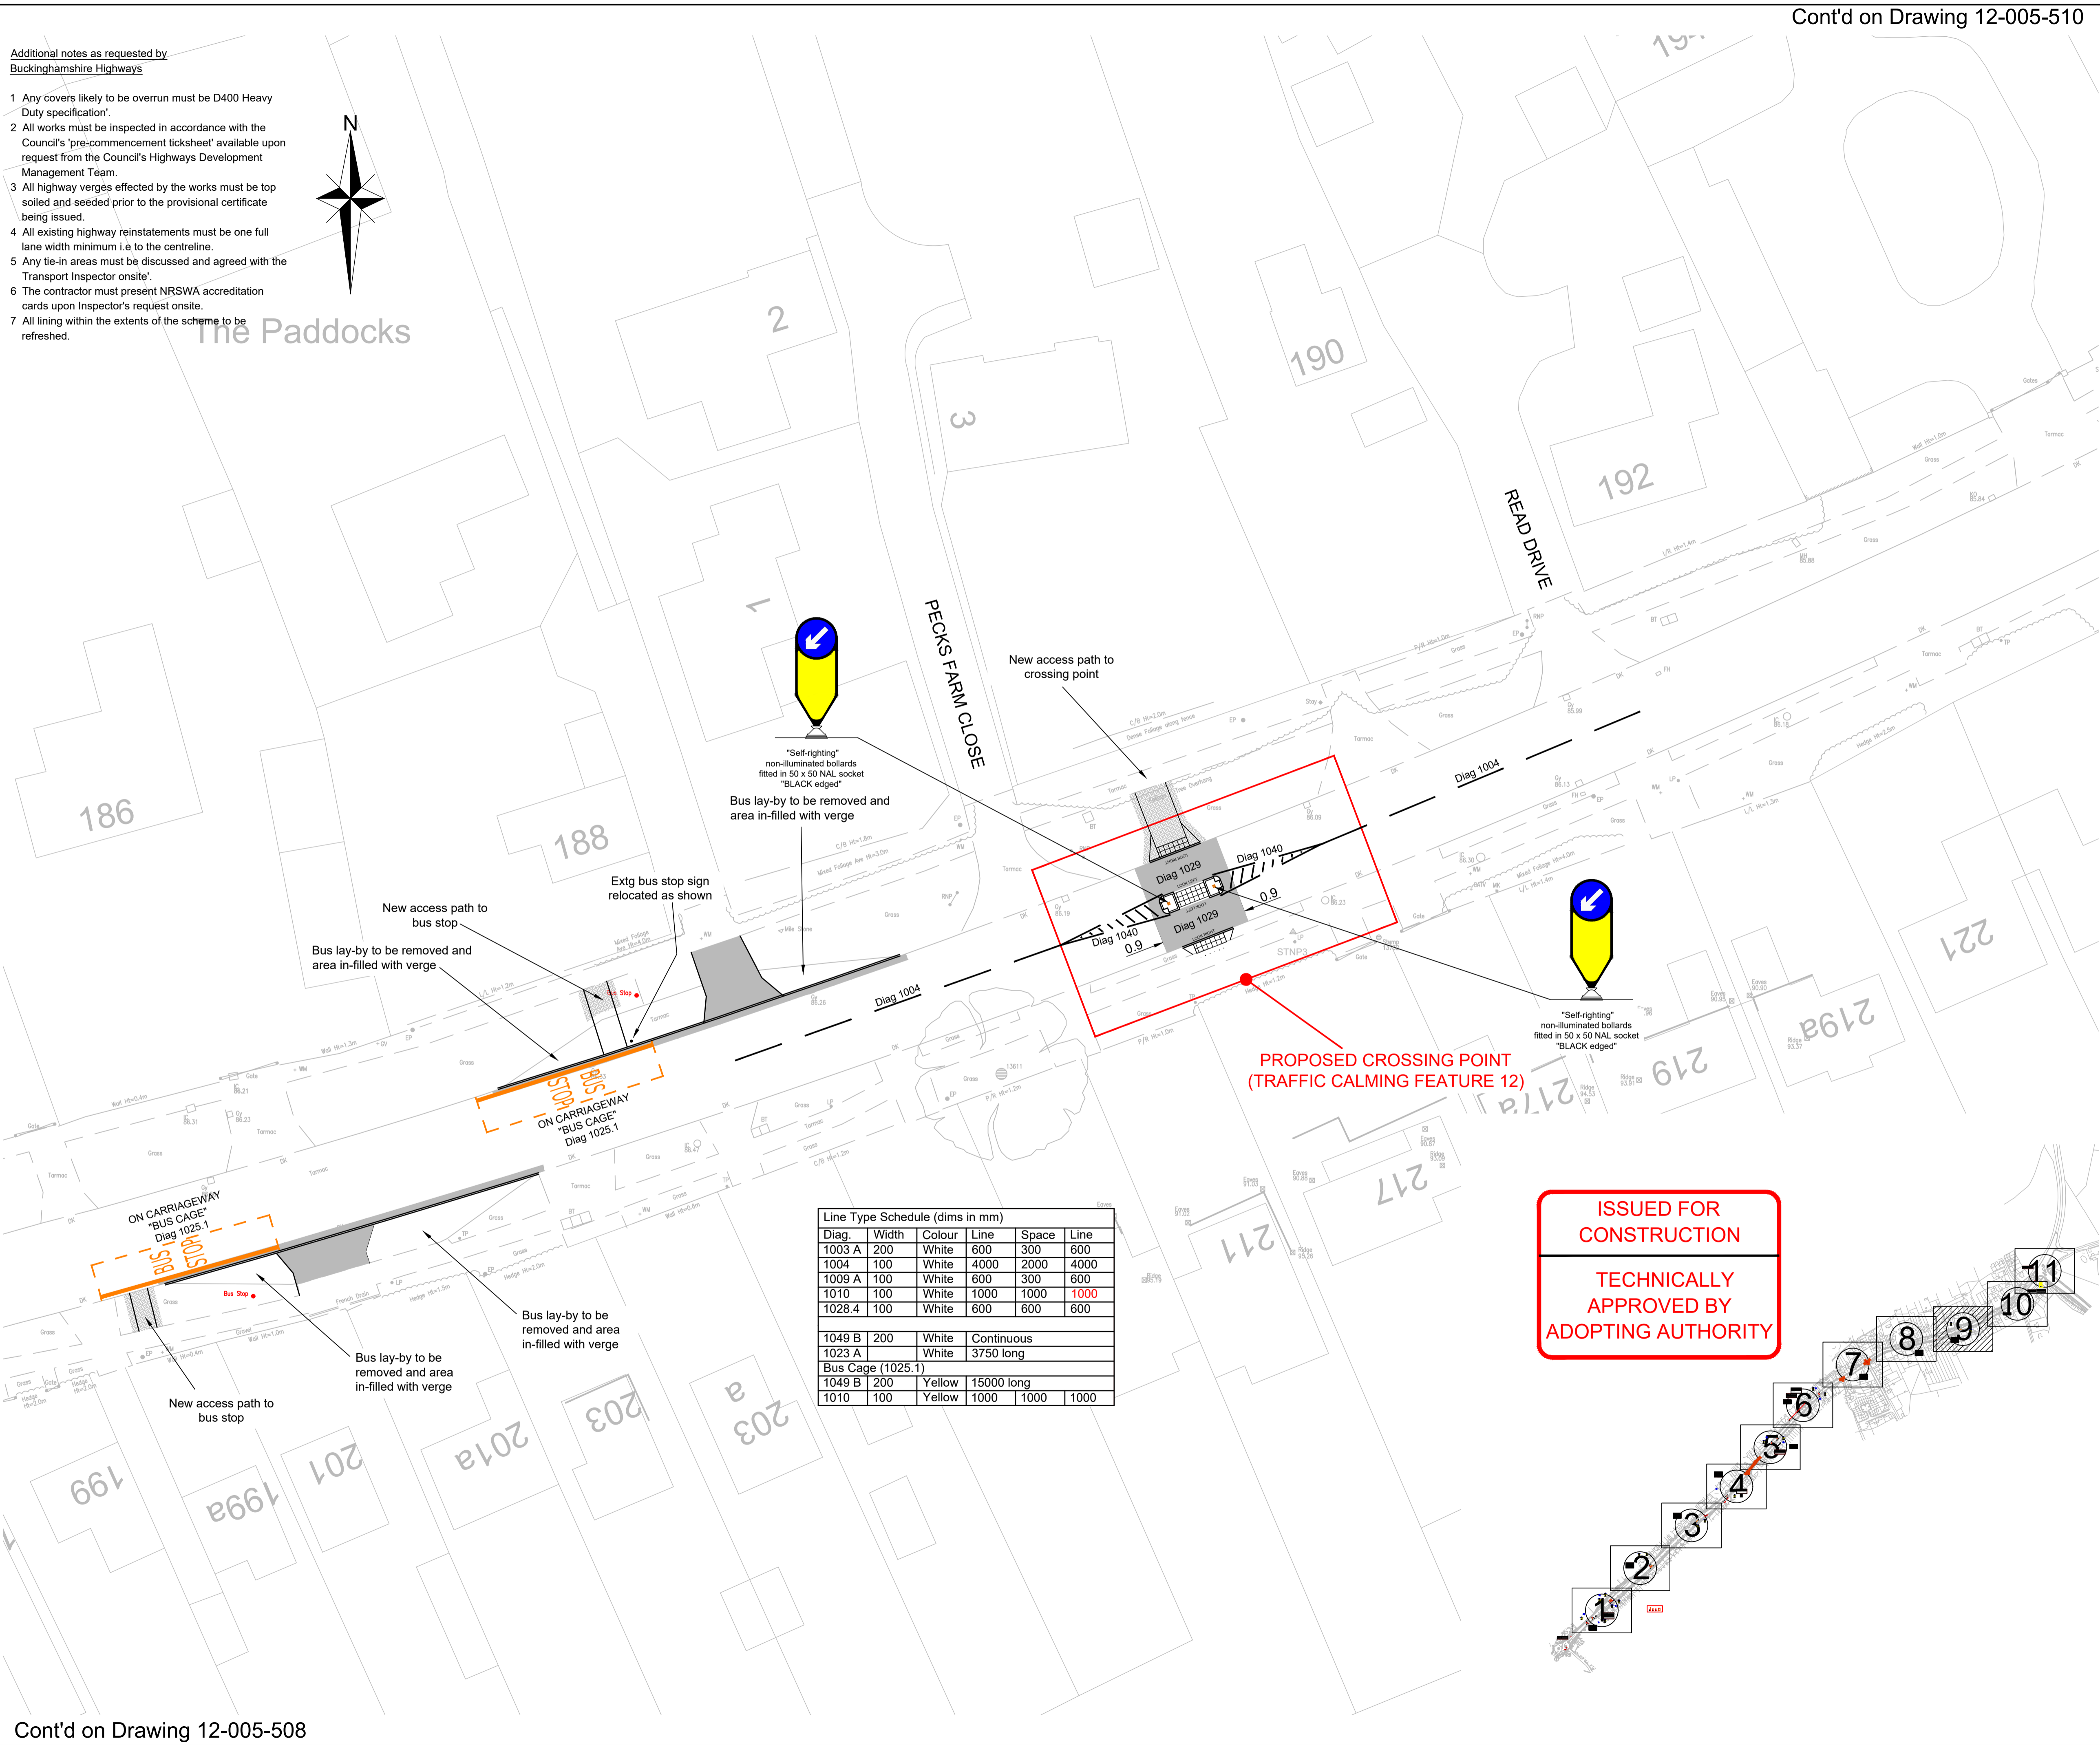

Line Type Schedule (dims in mm)					
Diag.	Width	Colour	Line	Space	Line
1003 A	200	White	600	300	600
1004	100	White	4000	2000	4000
1009 A	100	White	600	300	600
1010	100	White	1000	1000	1000
1028.4	100	White	600	600	600
1049 B	200	White	Continuous		
1023 A		White	3750 long		
Bus Cage (1025.1)					
1049 B	200	Yellow	15000 long		
1010	100	Yellow	1000	1000	1000

Cont'd on Drawing 12-005-510

- NOTES
1. This drawing is to be read in conjunction with the relevant specification and the following drawings:- 12-005-501 to 12-005-508 and 12-005-510 and 12-005-511 - General Arrangement Layouts.
 2. All materials and workmanship shall comply fully with the Manual of Contract Documents for Highways Works, Specification for Highways Works Volume 1 and the Buckinghamshire County Council Specification for Road Construction and Standard Details.
 3. Refer to drawings 12-005-512 to 12-005-522 inclusive for Site Clearance Plans.
 4. Refer to drawings 12-005-523 to 12-005-533 inclusive for Surface Finishes Plans.
 5. Refer to drawings 12-005-534 to 12-005-544 for the Existing Services Plans.
 6. Do NOT scale from this drawing. Work from figured dimensions and Setting Out information ONLY.

Rev	Amendments	Dm	Chk	App	Date
H	Amended following discussions with BC highways	EV	GG	GC	Mar 25
G	Amended following discussions with BC highways	EV	GG	GC	Feb 25
F	Issued for Construction - Technically approved	EV	GG	GC	July 24
E	Lining table amended following Technical Comments 3 from BC highways	EV	GG	GC	July 24
D	Amended following Technical Comments 2 from BC highways	EV	GG	GC	July 24
C	Bollards amended following comments from BC lighting engineering (Tim Edwards)	EV	GG	GC	June 24
B	Amended following comments from BC lighting engineering (Atkins realis)	EV	GG	GC	May 24
A	Amended following comments from BC highways	EV	GG	GC	May 24



Issued by Park House Station Road Hook Hampshire RG27 9HL 01296 638420 enquiries@c-a.uk.com www.c-a.uk.com

Approved by East Malling Trust Estate Braintree Lane Aylesford Kent ME28 6SN 01732 449768

Job Title Kingsbrook, Aylesbury Bierton Traffic Calming Measures		
Drawing Title General Arrangement Layout 9 of 11		
Client BDW North Thames Ltd		
Scale 1:250 @ A1	Date Jan 24	Designed GG
Drawn EV	Checked GW	Approved GAC
Job No 12-005	C & A Drawing No 12-005-509	Rev H
Client Drawing No 12-005-H6700-D2-509		

Cont'd on Drawing 12-005-508

Cont'd on Drawing 12-005-508